




1408 BROAD ST, REGINA, SK S4R 1Y9

Tel. (306) 751-7722 -- 1-866-244-4844 Fax 1-306-751-7735

Montreal Office: (450)-982-1101

www.wirelessource.ca

Cell Phone Signal Boosters for Anywhere

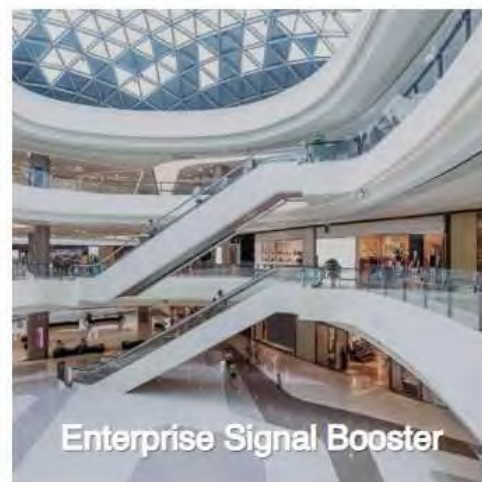


BOOST SIGNAL FOR EVERY US AND CANADIAN CARRIER

Rogers, Telus, Bell, Sasktel, AT&T, T-mobile, Verizon, US Cellular, Straight Talk, C-Spire, MetroPCS, Tracfone, Cricket, and more.

MOST POPULAR PRODUCTS CATALOGUE



HiBoost Consumer Booster Home 4K Plus Pro

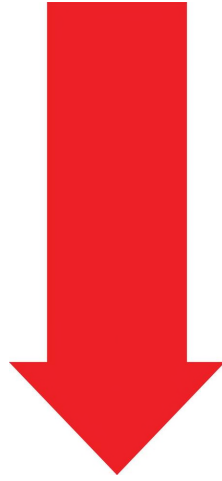

SPEC SHEET ON NEXT PAGE



HiBoost Consumer Booster Home 4K Plus Pro

Overview

The HiBoost Home 4K Plus Pro is a 65dB wide band cell phone signal booster that covers over 6,000 square feet with clear voice and high speed 2G, 3G, 4G voice and data. It can also support large capacities of over 100 cell phone users. With our Home 4K Plus Pro, enjoy an innovative mobile signal enhancement solution with a built-in indoor antenna and capability of remote monitoring.



FCC and IC Fulfillment

- FCC Grant Code OWW and IC Grant Code 10527A for this product series. To get detailed information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm> <http://www.ic.gc.ca/app/sitt/reletel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers



Key Features

- All 2G, 3G and 4G standards are supported
- Built-in indoor antenna
- Remote monitoring via a mobile APP
- LCD display, real-time system data display
- MGC + Smart AGC function
- Sleek & elegant design and durable construction
- Low interference to cell tower
- FCC and IC certified



Booster Kit Includes

- Home 4K Plus Pro signal booster
- Outdoor Wide Band Directional Antenna with 50 ft Low-loss HiBoost200 Cable
- Indoor Wide-Band Directional Panel Antenna with 50 ft Low-loss HiBoost200 Cable
- 12V / 3A, AC/DC Power Supply

Add: 6210 N Belt Line Rd., Ste. 110, Irving, TX 75063 Phone/Fax: (972) 870-5666 E-mail: info@hiboostusa.com
Website: www.hiboost.com

Specification

Working Band	Band 12/17 / Band 13 / Band 5 / Band 25/2 / Band 4
UL Frequency Range(MHz)	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range(MHz)	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max. Gain	65 dB
Max. Output Power	UL 24 dBm, DL 10 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	6*9.7*1.4 inch/152*246*36mm
Weight	≤ 5.0 lbs / 2 kg
Power Supply	Input AC100~240 V, 50/60 Hz, Output DC 12 V / 3 A



HiBoost Consumer Booster
Home 10K Plus



SPEC SHEET ON NEXT PAGE



HiBoost Consumer Booster Home 10K Plus

Overview

The HiBoost Home 10K Plus is a 68dB wide band cell phone signal booster that covers over 10,000 square feet with clear voice and high speed 2G, 3G, 4G voice and data. It can also support large capacities of over 150 cell phone users. With our Home 10K Plus, enjoy an innovative mobile signal enhancement solution with a built-in indoor antenna and capability of remote monitoring.



FCC and IC Fulfillment

- FCC Grant Code OWW and IC Grant Code 10527A for this product series. To get detailed information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm> <http://www.ic.gc.ca/app/sitt/reitel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers



Key Features

- All 2G, 3G and 4G standards are supported
- Built-in indoor antenna
- Remote monitoring via a mobile APP
- LCD display, real-time system data display
- MGC + Smart AGC function
- Sleek & elegant design and durable construction
- Low interference to cell tower
- FCC and IC certified



Booster Kit Includes


- Home 10K Plus signal booster
- Outdoor Wide Band Directional Antenna with 50 ft Low-loss HiBoost200 Cable
- 12V / 3A, AC/DC Power Supply

Specification

Working Band	Band 12/17 / Band 13 / Band 5 / Band 25/2 / Band 4
UL Frequency Range(MHz)	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range(MHz)	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max. Gain	68 dB
Max. Output Power	UL 24 dBm, DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	6*9.7*1.4 inch/152*246*36mm
Weight	≤ 5.0 lbs / 2 kg
Power Supply	Input AC100~240 V, 50/60 Hz, Output DC 12 V / 3 A



HiBoost Consumer Booster
Home 10K Plus Pro

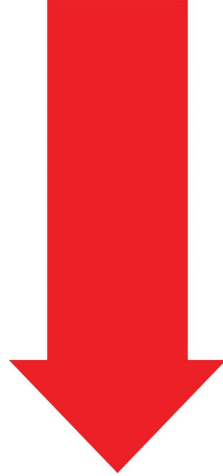

SPEC SHEET ON NEXT PAGE



HiBoost Consumer Booster Home 10K Plus Pro

Overview

The HiBoost Home 10K Plus Pro is a 68dB wide band cell phone signal booster that covers over 12,000 square feet with clear voice and high speed 2G, 3G, 4G voice and data. It can also support large capacities of over 150 cell phone users. With our Home 10K Plus Pro, enjoy an innovative mobile signal enhancement solution with a built-in indoor antenna and capability of remote monitoring.



FCC and IC Fulfillment

- FCC Grant Code OWW and IC Grant Code 10527A for this product series. To get detailed information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm> <http://www.ic.gc.ca/app/sitt/reltel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers



Key Features

- All 2G, 3G and 4G standards are supported
- Built-in indoor antenna
- Remote monitoring via a mobile APP
- LCD display, real-time system data display
- MGC + Smart AGC function
- Sleek & elegant design and durable construction
- Low interference to cell tower
- FCC and IC certified



Booster Kit Includes

- Home 10K Plus Pro signal booster
- Outdoor Wide Band Directional Antenna with 50 ft Low-loss HiBoost200 Cable
- Indoor Wide-Band Directional Panel Antenna with 50 ft Low-loss HiBoost200 Cable
- 12V / 3A, AC/DC Power Supply

Add: 6210 N Belt Line Rd., Ste. 110, Irving, TX 75063 Phone/Fax: (972) 870-5666 E-mail: info@hiboostusa.com
Website: www.hiboost.com

Specification

Working Band	Band 12/17 / Band 13 / Band 5 / Band 25/2 / Band 4
UL Frequency Range(MHz)	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range(MHz)	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max. Gain	68 dB
Max. Output Power	UL 24 dBm, DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	6*9.7*1.4 inch/152*246*36mm
Weight	≤ 5.0 lbs / 2 kg
Power Supply	Input AC100~240 V, 50/60 Hz, Output DC 12 V / 3 A

HiBoost 15K Smart Link

Consumer Booster Series



SPEC SHEET ON NEXT PAGE



HiBoost 15K Smart Link Consumer Booster Series

Product Overview


The HiBoost 15K Smart Link is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for home or office use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The Home 15K Smart Link power boosting capabilities easily cover a range of up to 15,000 square feet and boasts a +70-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!

Key Features:

- Coverage up to 15,000 square feet
- (+) 70-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty



How it Works

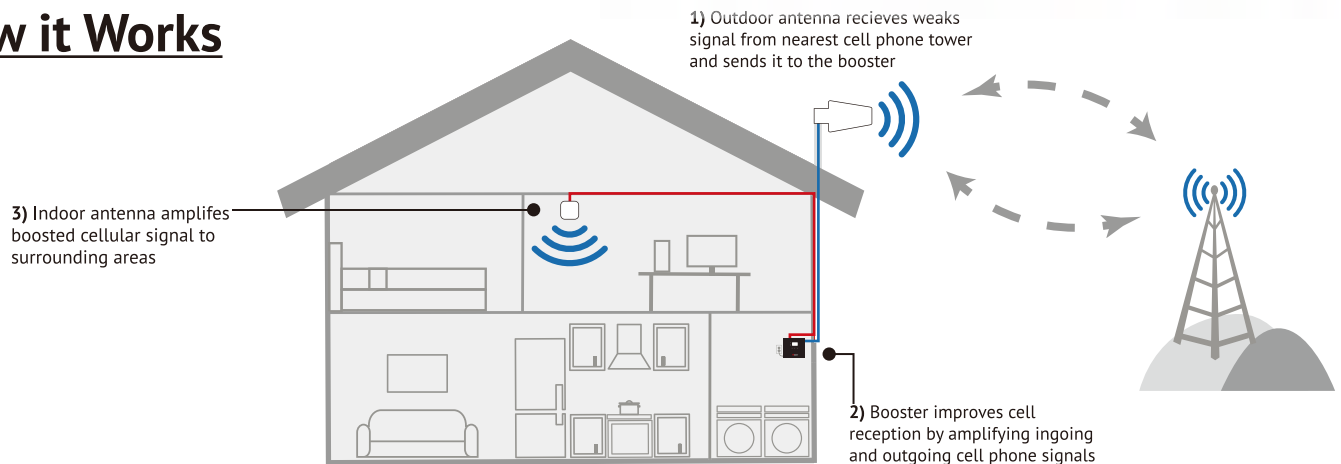

Please contact our customer support for more information.

Email: info@hiboostusa.com

Phone: (972) 870-5666





Technical Specifications

HiBoost 15K Smart Link

Model: F20G-5S-BTW

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	70 dB
Maximum Output Power	UL 24 dBm, DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	8.6 in x 6.5 in x 2 in / 218 mm x 165 mm x 50 mm
Weight	≥ 5.0 lb / 2.2 kg
Power Supply	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.

HiBoost SLW

Commercial Booster Series



SPEC SHEET ON NEXT PAGE



HiBoost SLW

Commercial Booster Series

Product Overview


The HiBoost SLW is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for commercial use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The SLW's powerful boosting capabilities easily cover a range of up to 35,000 square feet and boasts a +72-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!



Key Features:

- Coverage up to 35,000 square feet
- (+) 72-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty

How it Works

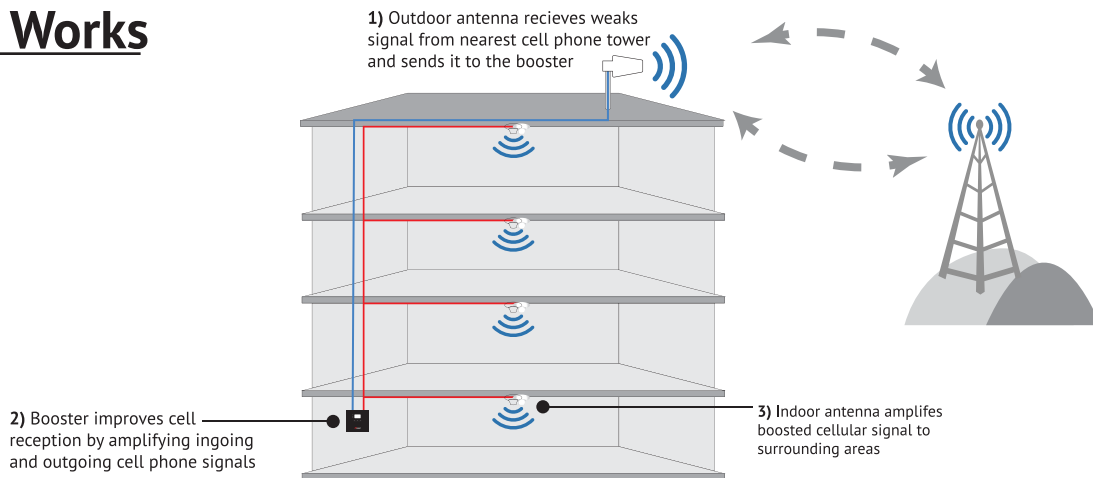

All accessories are available separately. Contact us for more information about a RF site analysis.

Email: info@hiboostusa.com

Phone: (972) 870-5666





Technical Specifications

HiBoost SLW

Model: Pro25-5S-BTW

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	72 dB
Maximum Output Power	UL 24 dBm, DL 15 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	8.7 in x 7.3 in x 2.2 in / 220 mm x 185 mm x 55 mm
Weight	≤ 11 lb / 5 kg
Power Supply	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.


You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.

HiBoost Vehicle Booster Travel 2.0 Car

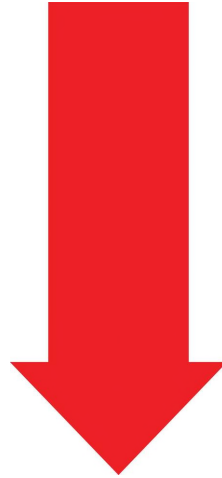

SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 2.0 Car

Overview

The HiBoost Travel 4G is a 50dB, ultra wide band cell phone signal booster that provides a complete solution for all vehicles. Improve 2G, 3G, 4G LTE and 5G cell phone signal strength for voice and data, especially in poor signal areas. With standardized industrial level design, strict testing and competitive pricing, the Travel 4G 2.0 provides a superior communication experience with clearer calls and faster data speeds than ever before.





Key Features

- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- Streamlined design
- Quality metal construction, strong and durable
- Good heat dissipation for longevity
- Low interference to cell tower
- Multiple users are supported
- 3 years warranty
- FCC and IC certified




Booster Kit Includes

- Travel 2.0 Car cell phone booster
- Outside Magnetic Antenna
- Inside Panel Antenna
- DC power Supply
- Other Accessories

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
Max Power	UL 22 dBm / DL 0 dBm
I/O Port	SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	≥ 0.9 lbs / 0.4 kg
Power Supply	Input DC12-24V, Output DC5V/3A

HiBoost Vehicle Booster Travel 2.0 RV

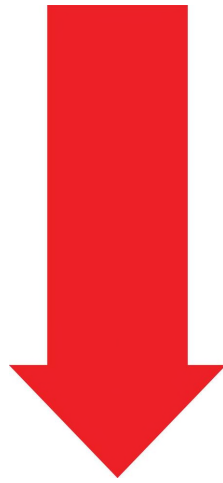

SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 2.0 RV

Overview

The HiBoost Travel 4G is a 50dB, ultra wide band cell phone signal booster that provides a complete solution for all vehicles. Improve 2G, 3G, 4G LTE and 5G cell phone signal strength for voice and data, especially in poor signal areas. With standardized industrial level design, strict testing and competitive pricing, the Travel 4G 2.0 provides a superior communication experience with clearer calls and faster data speeds than ever before.





Key Features

- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- Streamlined design
- Quality metal construction, strong and durable
- Good heat dissipation for longevity
- Low interference to cell tower
- Multiple users are supported
- 3 years warranty
- FCC and IC certified



Booster Kit Includes

- Travel 2.0 RV cell phone booster
- Outside Omni-directional Antenna
- Inside Magnetic Antenna
- DC Power Supply & Power Adapter
- Outside Cable
- Other Accessories

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
Max Power	UL 22 dBm / DL 0 dBm
I/O Port	SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	≥ 0.9 lbs / 0.4 kg
Power Supply	Input DC12-24V, Output DC5V/3A

HiBoost Vehicle Booster Travel 2.0 Truck



SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 2.0 Truck

Overview

The HiBoost Travel 4G is a 50dB, ultra wide band cell phone signal booster that provides a complete solution for all vehicles. Improve 2G, 3G, 4G LTE and 5G cell phone signal strength for voice and data, especially in poor signal areas. With standardized industrial level design, strict testing and competitive pricing, the Travel 4G 2.0 provides a superior communication experience with clearer calls and faster data speeds than ever before.





Key Features

- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- Streamlined design
- Quality metal construction, strong and durable
- Good heat dissipation for longevity
- Low interference to cell tower
- Multiple users are supported
- 3 years warranty
- FCC and IC certified




Booster Kit Includes

- Travel 2.0 Truck cell phone booster
- Outside Omni-directional Antenna
- Inside Panel Antenna
- DC Power Supply
- Outside Cable
- Other Accessories

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
Max Power	UL 22 dBm / DL 0 dBm
I/O Port	SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	\geq 0.9 lbs / 0.4 kg
Power Supply	Input DC12-24V, Output DC5V/3A

HiBoost Vehicle Booster Travel 3.0 Car

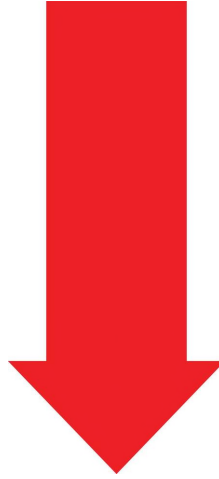

SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 3.0 Car

The HiBoost Travel 3.0 Car is a 50dB, ultra wide band cell phone signal booster that provides a cellular signal solution for car, van, SUV, etc. It can improve 2G, 3G, 4G LTE and 5G cell phone signal quality and coverage in voice, text and internet speed for areas with poor signal. With standardized industrial-grade design, upgraded performance and strict testing, Travel 3.0 Car provides a superior signal experience with clearer calls and faster data speed than ever before!



Kit Includes



Booster




Outside Magnetic Antenna



Inside Panel Antenna



DC Power Supply



Other Accessories




Key Features

- Supports all US and Canadian carriers
- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- User-friendly remote monitoring via Signal Supervisor app
- Good heat dissipation for longevity
- Multiple users/devices are supported
- Well adapted to complicated scenes
- Timely and reliable technical support via phone, email and online chat
- 3 years warranty
- FCC and IC certified

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
I/O Port	RPSMA-K / SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	\geq 2.6 lbs / 1.2 kg
Dimensions	6.5 x 4.7 x 1.9 in
Power Supply	Input DC12-24V, Output DC12V-24V/3A Input AC100-240V/1.5A, Output DC12V/3A

HiBoost Vehicle Booster Travel 3.0 RV

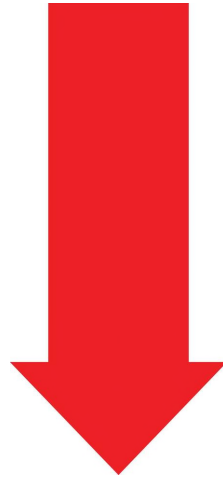

SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 3.0 RV

The HiBoost Travel 3.0 RV is a 50dB, ultra wide band cell phone signal booster that provides a cellular signal solution for RV, Camper, etc. It can improve 2G, 3G, 4G LTE and 5G cell phone signal quality and coverage in voice, text and internet speed for areas with poor signal. With standardized industrial-grade design, upgraded performance and strict testing, Travel 3.0 RV provides a superior signal experience with clearer calls and faster data speed than ever before!



Kit Includes



Booster



Outside Omni
Antenna



Inside Magnetic
Antenna



Outside 26ft Cable



DC Power Supply



Power Adapter



Key Features

- Supports all US and Canadian carriers
- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- User-friendly remote monitoring via Signal Supervisor app
- Good heat dissipation for longevity
- Multiple users/devices are supported
- Well adapted to complicated scenes
- Timely and reliable technical support via phone, email and online chat
- 3 years warranty
- FCC and IC certified

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
I/O Port	RPSMA-K / SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	\geq 2.6 lbs / 1.2 kg
Dimensions	6.5 x 4.7 x 1.9 in
Power Supply	Input DC12-24V, Output DC12V-24V/3A Input AC100-240V/1.5A, Output DC12V/3A

HiBoost Vehicle Booster Travel 3.0 Truck



SPEC SHEET ON NEXT PAGE



HiBoost Vehicle Booster Travel 3.0 Truck

The HiBoost Travel 3.0 Truck is a 50dB, ultra wide band cell phone signal booster that provides a cellular signal solution for truck. It can improve 2G, 3G, 4G LTE and 5G cell phone signal quality and coverage in voice, text and internet speed for areas with poor signal. With standardized industrial-grade design, upgraded performance and strict testing, Travel 3.0 Truck provides a superior signal experience with clearer calls and faster data speed than ever before!



Kit Includes



Booster



Outside Omni Antenna



Inside Panel Antenna



Outside 15ft Cable



DC Power Supply



Key Features

- Supports all US and Canadian carriers
- Compatible with 3G, 4G LTE and 5G DSS cellular standards
- User-friendly remote monitoring via Signal Supervisor app
- Good heat dissipation for longevity
- Multiple users/devices are supported
- Well adapted to complicated scenes
- Timely and reliable technical support via phone, email and online chat
- 3 years warranty
- FCC and IC certified

Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Max Gain	50 dB
I/O Port	RPSMA-K / SMA-Female
Impedance	50 Ω
Environment Conditions	IP40
Weight	≥ 2.6 lbs / 1.2 kg
Dimensions	6.5 x 4.7 x 1.9 in
Power Supply	Input DC12-24V, Output DC12V-24V/3A Input AC100-240V/1.5A, Output DC12V/3A

HiBoost 4K Smart Link Consumer Booster Series



SPEC SHEET ON NEXT PAGE



HiBoost 4K Smart Link Consumer Booster Series


Product Overview

The HiBoost 4K Smart Link is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for home or office use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The Home 4K Smart Link powerful boosting capabilities easily cover a range of up to 4,000 square feet and boasts a +60-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!

Key Features:

- Coverage up to 4,000 square feet
- (+) 60-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty

How it Works

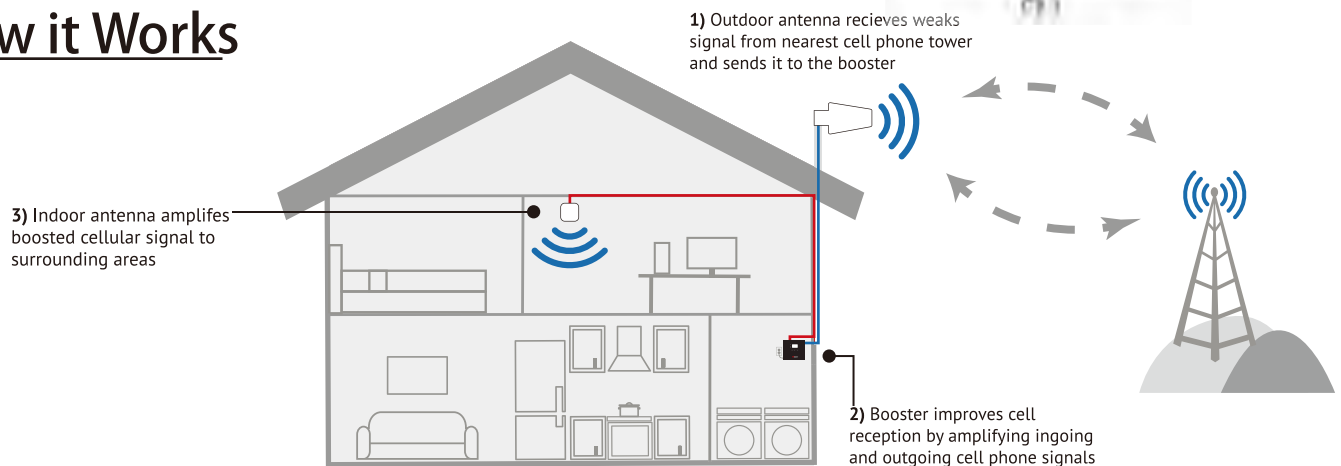

Please contact our customer support for more information.

Email: info@hiboostusa.com

Phone: (972) 870-5666





Technical Specifications

HiBoost 4K Smart Link

Model: F10G-5S-BTW

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	60 dB
Maximum Output Power	UL 24 dBm, DL 10 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	F-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	4.7 in x 7.8 in x 1.4 in / 120 mm x 198 mm x 34 mm
Weight	≥ 4.0 lb / 1.8 kg
Power Supply	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.


You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.

HiBoost 10K Smart Link Consumer Booster Series

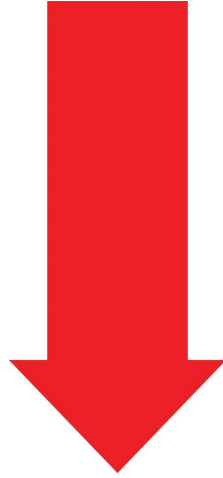

SPEC SHEET ON NEXT PAGE



HiBoost 10K Smart Link Consumer Booster Series

Product Overview


The HiBoost 10K Smart Link is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for home or office use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The Home 10K Smart Link power boosting capabilities easily cover a range of up to 10,000 square feet and boasts a +65-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!

Key Features:

- Coverage up to 10,000 square feet
- (+) 65-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty



How it Works

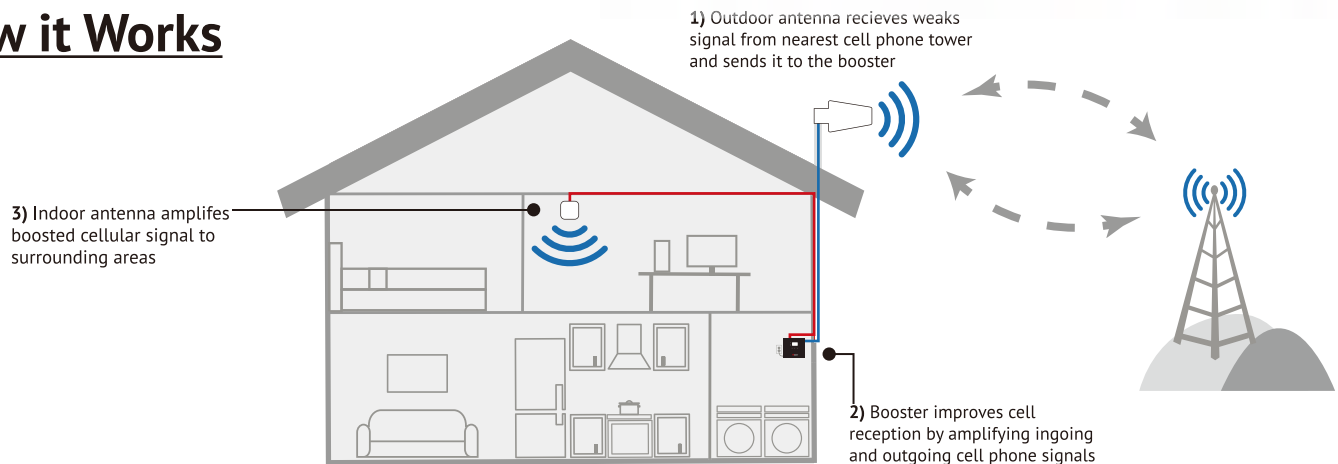

Please contact our customer support for more information.

Email: info@hiboostusa.com

Phone: (972) 870-5666





Technical Specifications

HiBoost 10K Smart Link

Model: F15G-5S-BTW

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	65 dB
Maximum Output Power	UL 24 dBm, DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	8.6 in x 6.5 in x 2 in / 218 mm x 165 mm x 50 mm
Weight	≥ 5.0 lb / 2.2 kg
Power Supply	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.


You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.



HiBoost Consumer Booster
Home 10K Plus Pro

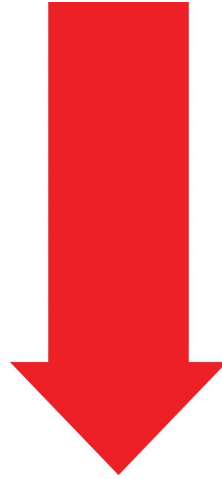

SPEC SHEET ON NEXT PAGE



HiBoost Consumer Booster Home 10K Plus Pro

Overview

The HiBoost Home 10K Plus Pro is a 68dB wide band cell phone signal booster that covers over 12,000 square feet with clear voice and high speed 2G, 3G, 4G voice and data. It can also support large capacities of over 150 cell phone users. With our Home 10K Plus Pro, enjoy an innovative mobile signal enhancement solution with a built-in indoor antenna and capability of remote monitoring.



FCC and IC Fulfillment

- FCC Grant Code OWW and IC Grant Code 10527A for this product series. To get detailed information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm>
<http://www.ic.gc.ca/app/sitt/reltel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers



Key Features

- All 2G, 3G and 4G standards are supported
- Built-in indoor antenna
- Remote monitoring via a mobile APP
- LCD display, real-time system data display
- MGC + Smart AGC function
- Sleek & elegant design and durable construction
- Low interference to cell tower
- FCC and IC certified



Booster Kit Includes

- Home 10K Plus Pro signal booster
- Outdoor Wide Band Directional Antenna with 50 ft Low-loss HiBoost200 Cable
- Indoor Wide-Band Directional Panel Antenna with 50 ft Low-loss HiBoost200 Cable
- 12V / 3A, AC/DC Power Supply

Add: 6210 N Belt Line Rd., Ste. 110, Irving, TX 75063 Phone/Fax: (972) 870-5666 E-mail: info@hiboostusa.com
Website: www.hiboost.com

Specification

Working Band	Band 12/17 / Band 13 / Band 5 / Band 25/2 / Band 4
UL Frequency Range(MHz)	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range(MHz)	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max. Gain	68 dB
Max. Output Power	UL 24 dBm, DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	6*9.7*1.4 inch/152*246*36mm
Weight	≤ 5.0 lbs / 2 kg
Power Supply	Input AC100~240 V, 50/60 Hz, Output DC 12 V / 3 A